

GALA Solutions Ltd

Your Coding Specialist & Partner



CODING AND MARKING SOLUTIONS

NEW ZEALAND BRANCH

PO Box 51793, Auckland 2140
3A Joval Ave, Wiri Auckland 2013, New Zealand

Phone: +64 9 262 0995

Email: support@galas.co.nz

www.galas.co.nz

AUSTRALIAN BRANCH

PO Box 213, Oxenford, QLD

Shop 20 / 100-106 Old Pacific Highway, Oxenford 4210,
Queensland, Australia

Offices in VIC/NSW/WA/SA

Phone: +61 7 5665 8284 **Email:** support@galasolutions.com.au

www.galasolutions.com.au

ABOUT RN MARK

RN Mark Inc, a **Canadian manufacturer** based out of Richmond Hill - Ontario, was established in 2002. Since then, our engineers and dedicated team have strived to create top-shelf machines that fit seamlessly into any line, keeping costs down and production moving. For **over 20 years**, we've had the pleasure of designing and providing high performance, and affordable industrial inkjet printers.

Our RN Mark user-friendly software is capable of printing the following data on practically any surface you need including Static text, Auto date & time, Julian date, Jalali date, Auto manufacture date, Auto expiry date, Batch number, Logo, Image, QR code, Serial number, Auto shift codes, GS1 Data Matrix, UDI, Database, Counter, External text (weight & other info from scale and barcode scanner)



Print Speed

Our printers could print up to 180 m/min; keeping up with your production line while maintaining superior print quality.



Canadian Quality

We are a proudly Canadian company; our machines are designed and fully manufactured by our skilled team of technicians in Ontario.



Print Height

Up to 288mm in height using a large character machine with stitched heads; variety of colors available.



Resolution

Our machines maintain top-shelf resolution up to 600 dpi when printing on practically any material, porous or non-porous.



Bi-color printing with two heads

MAKE YOUR BRAND STAND OUT WITH RNJET PRINTERS!

RNJET H SERIES

NO ERRORS
DOWNTIME
MAINTENANCE



RNJET H1



RNJET H2 ST

STANDARD FEATURES

Display	7" touchscreen LCD controller	
No. of Print Heads	1	2 (Stitched)
Printing Speed	up to 180 m/min (150 dpi) or up to 90 m/min (300 dpi)	
Max. Print Height	up to 12.7 mm	up to 25 mm
Printing Distance	up to 8 mm	
Printing Orientation	Side Printing, downwards, at an angle	
Min. Drying Time for non-porous material	1 to 3 seconds, depending on material	
Min. Drying Time for porous material	N/A	
Max. Printing Length (non-stop)	up to 5500 mm	up to 4400 mm
Warranty	3 YEARS*	

INK AND OPERATING CONDITIONS

Ink System	Cartridge
Ink Management	Ink calculator, ink level indicator on controller & printdriver, output for optional ink beacon alarm
Ink Colors	Red, blue, black, pigmented white and yellow, USDA-approved FDG ink, as well as UV black and UV white
Ink Types	Variety of solvent-based, water-based and food-grade inks
Operating Conditions	Temp: 5°C -45°C Relative Humidity: 20% - 80%

RNJET EP-6H+

- Ideal for egg printing
- Up to 12.7 mm (1/2") height
- Up to 6 heads
- USDA-approved ink
- Print up to 130,000 eggs/hour or 30 eggs/second
- Food Grade Ink available in Dark Pink, Blue and Green



*Terms and conditions apply. Check Refund and Return Policy at www.mnmark.com



RNJET H SERIES

**DATE CODER
LOT PRINTER
AFFORDABLE**

RNJet H2



RNJet H4



RNJet H4 ST



RNJet H24



STANDARD FEATURES

Display	7" touchscreen LCD controller			
No. of Print Heads	2 (Non-Stitched)	4 (Non-Stitched)	4 (Stitched)	up to 24 (Non-Stitched)
Printing Speed	up to 180 m/min (150 dpi) or up to 90 m/min (300 dpi)			
Max. Print Height	up to 12.7 mm (Each)	up to 12.7 mm (Each)	up to 50 mm	up to 12.7 mm (Each)
Printing Distance	up to 8 mm			
Printing Orientation	Side printing, downwards, at an angle			
Min. Drying Time for non-porous material	1 to 3 seconds, depending on material			
Min. Drying Time for porous material	N/A			
Max. Printing Length (non-stop)	up to 4400 mm	up to 4400 mm	up to 4400 mm	up to 4400 mm
Warranty	<u>3 YEARS*</u>			

INK AND OPERATING CONDITIONS

Ink System	Cartridge
Ink Management	Ink calculator, ink level indicator on controller & printdriver, output for optional ink beacon alarm
Ink Colors	Red, blue, black, pigmented white and yellow, USDA-approved FDG ink, as well as UV black and UV white
Ink Types	Variety of solvent-based, water-based and food-grade inks
Operating Conditions	Temp: 5°C -45°C Relative Humidity: 20% - 80%

*Terms and conditions apply. Check Refund and Return Policy at www.mmark.com



RNJET T SERIES



**BATCH CODER
NO
MAINTENANCE**

RNJet T1

RNJet T2 ST

RNJet T4 ST

RNJet T4


STANDARD FEATURES

Display	7" touchscreen LCD controller			
No. of Print Heads	1	2 (Stitched)	4 (Stitched)	4 (Non-Stitched)
Printing Speed	up to 90 m/min (300 dpi)			
Max. Print Height	up to 25.4 mm (1 Inch)	up to 50.8 mm (2 Inch)	up to 101.6 mm (4 Inch)	up to 25.4 mm (Each)
Printing Distance	up to 8 mm			
Printing Orientation	Side printing, downwards			
Min. Drying Time for non-porous material	1 to 3 seconds, depending on material			
Min. Drying Time for porous material	N/A			
Max. Printing Length (non-stop)	up to 4400 mm	up to 2200 mm	up to 2200 mm	up to 2200 mm
Warranty	<u>1 YEAR*</u>			

INK AND OPERATING CONDITIONS

Ink System	Cartridge
Ink Management	Ink calculator, ink level indicator on controller & printdriver, output for optional ink beacon alarm
Ink Colors	Black
Ink Types	Solvent-based, Water-based
Operating Conditions	Temp: 5°C -45°C Relative Humidity: 20% - 80%

*Terms and conditions apply. Check Refund and Return Policy at www.mmark.com

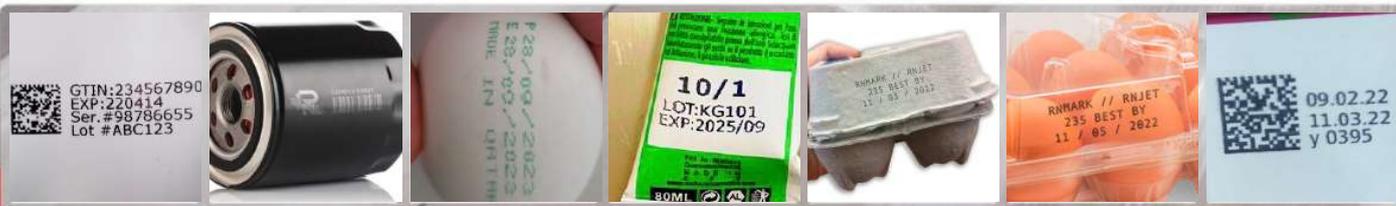

RNJET HI-RES SMALL CHARACTER

**ALTERNATIVE
TO CIJ
RELIABLE
ECONOMICAL**

RNJet 100



RNJet 200



RNJet 100+



RNJet 200+



STANDARD FEATURES

Display	7" touchscreen LCD controller			
No. of Print Heads	1	2	1	2
Printing Speed	up to 40 m/min (180 dpi) or up to 60 m/min (100 dpi)			
Max. Print Height	up to 18 mm	up to 36 mm	up to 18 mm	up to 36 mm
Printing Distance	up to 15 mm			
Printing Orientation	Side printing, downwards, upwards, at an angle			
Min. Drying Time for non-porous material	10 to 15 seconds, depending on material			
Min. Drying Time for porous material	N/A			
Max. Printing Length (non-stop)	up to 9200 mm			
Warranty	<u>1 YEAR*</u>			

INK AND OPERATING CONDITIONS

Ink System	Cartridge-Based (110 ml cartridge)	Motorized bulk-based system (490 ml bottle)
Ink Management	Ink calculator, output for optional ink beacon alarm	Ink calculator, low ink indicator, output for ink beacon alarm
Ink Colors	Red, blue, black, pigmented white and yellow, food-grade red and blue	Red, blue, black, food-grade red and blue
Ink Types	Solvent-based, oil-based and food-grade inks	
Operating Conditions	Temp: 5°C-45°C; Special ink: -5°C -45°C Relative Humidity: 20% - 80%	

*Terms and conditions apply. Check Refund and Return Policy at www.mmark.com



RNJET HI-RES LARGE CHARACTER

**BOX PRINTER
PALLET
PRINTER
COST-
EFFECTIVE**

RNJet 72



RNJet E1-140



RNJet E1-72+



**RNJet E1-140+
(Bi-color)**



STANDARD FEATURES

Display	7" touchscreen LCD controller			
No. of Print Heads	1	2	1	2
Printing Speed	up to 60 m/min (180 dpi) or up to 90 m/min (100 dpi)			
Max. Print Height	up to 72 mm	up to 144 mm	up to 72 mm	up to 144 mm
Printing Distance	up to 15 mm			
Printing Orientation	Side printing, downwards, upwards, at an angle			
Min. Drying Time for non-porous material	10 to 15 seconds, depending on material			
Min. Drying Time for porous material	N/A			
Max. Printing Length (non-stop)	up to 4600 mm	up to 2300 mm	up to 4600 mm	up to 2300 mm
Warranty	<u>1 YEAR*</u>			

INK AND OPERATING CONDITIONS

Ink System	Cartridge-Based (110 ml cartridge)	Motorized bulk-based system (490 ml bottle)
Ink Management	Ink calculator, output for optional ink beacon alarm	Ink calculator, low ink indicator, output for ink beacon alarm
Ink Colors	Red, blue, black, pigmented white and yellow, food-grade red and blue	Red, blue, black, food-grade red and blue
Ink Types	Solvent-based, oil-based and food-grade inks	
Operating Conditions	Temp: 5°C-45°C; Special ink: -5°C -45°C Relative Humidity: 20% - 80%	

*Terms and conditions apply. Check Refund and Return Policy at www.mmark.com



RNJET HI-RES XL SERIES

**BOX PRINTER
PALLET
PRINTER
AFFORDABLE**

RNJet 100 XL



RNJet 200 XL



RNJet 72 XL



RNJet 140 XL




STANDARD FEATURES

Display	7" touchscreen LCD controller			
No. of Print Heads	1	2	1	2
Printing Speed	up to 60 m/min (100 dpi)		up to 60 m/min (180 dpi)	
Max. Print Height	up to 18 mm	up to 36 mm	up to 72 mm	up to 144 mm
Printing Distance	up to 15 mm			
Printing Orientation	Side printing, downwards, upwards, at an angle			
Min. Drying Time for non-porous material	10 to 15 seconds, depending on material			
Min. Drying Time for porous material	N/A			
Max. Printing Length (non-stop)	up to 9200 mm		up to 4600 mm	up to 2300 mm
Warranty	<u>1 YEAR*</u>			

INK AND OPERATING CONDITIONS

Ink System	Cartridge-Based (430 ml cartridge)
Ink Management	Ink calculator, output for optional ink beacon alarm
Ink Colors	Red, blue, black, pigmented white and yellow, food-grade red and blue
Ink Types	Solvent-based, oil-based and food-grade inks
Operating Conditions	Temp: 5°C-45°C; Special ink: -5°C -45°C Relative Humidity: 20% - 80%

*Terms and conditions apply. Check Refund and Return Policy at www.mmark.com

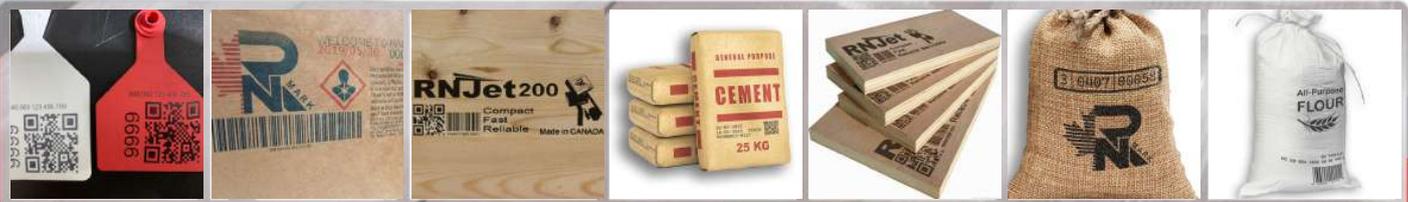

RNJET HI-RES LARGE CHARACTER

NO ERRORS
DOWNTIME
MAINTENANCE

RNJET 288 XL



RNJET E1-288+



STANDARD FEATURES

Display	7" touchscreen LCD controller
No. of Print Heads	4
Printing Speed	up to 60 m/min (180 dpi) or up to 90 m/min (100 dpi)
Max. Print Height	up to 288 mm
Printing Distance	up to 15 mm
Printing Orientation	Downwards
Min. Drying Time for non-porous material	10 to 15 seconds, depending on material
Min. Drying Time for porous material	N/A
Max. Printing Length (non-stop)	up to 2300 mm
Warranty	<u>1 YEAR*</u>


INK AND OPERATING CONDITIONS

Ink System	Cartridge-Based (430 ml cartridge)	Motorized bulk-based system (490 ml bottle)
Ink Management	Ink calculator, output for optional ink beacon alarm	Ink calculator, low ink indicator, output for ink beacon alarm
Ink Colors	Red, blue, black, pigmented white and yellow, food-grade red and blue	Red, blue, black, food-grade red and blue
Ink Types	Solvent-based, oil-based and food-grade inks	
Operating Conditions	Temp: 5°C-45°C; Special ink: -5°C -45°C Relative Humidity: 20% - 80%	

*Terms and conditions apply. Check Refund and Return Policy at www.mmark.com



TRACK AND TRACE SOLUTIONS

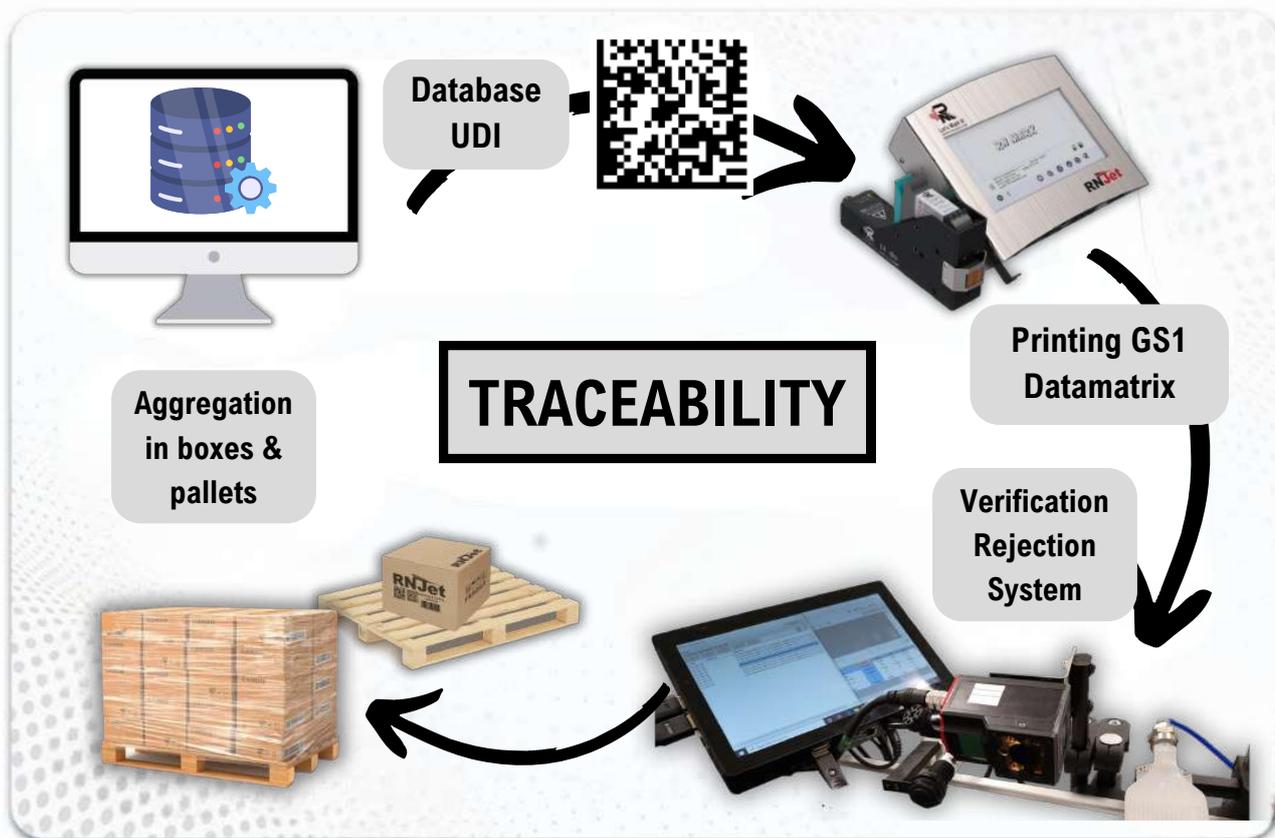

Optional Vision Inspection Solutions for Marking & Coding Quality

We are proud to offer full-featured, powerful vision systems which perform fast, accurate inspections of every product marking that passes through your production line.

These systems help to ensure quality and compliance by checking the print quality, position readability and accuracy of codes.


This works by obtaining serial number information from the company or manufacturing server. Each object is marked with an encoded, unique serial number using a Data Matrix. A sophisticated vision system consisting of multiple cameras verifies the quality of the markings, and an integrated reject system reliably removes failed items from the production line.



We are glad to announce that with cooperation between RN Mark and NiceLabel software team, we could offer our clients opportunities to use RNJet printers with NiceLabel software. Simply download the driver.




SOFTWARE & NETWORK ABILITIES

DESCRIPTION	PRINT SAMPLES
Linear Bar Codes (EAN, ITF-14, UPCA, GS1, Databar, and many more)	
2D Codes (QR, GS1 DataMatrix Standard, Dot Code, GS1 Databar-Stacked & Limited, MicroPDF and many more)	
Logos & Graphics (Print any image, logo, graphic or icon with Dither or Negatvie)	
Specialty Fonts (Download any TTF Fonts such as Arial, Dot Font, and many more)	

RN SOFTWARE


RNSoft allows up to 100 printers to be connected simultaneously to one PC through your network.

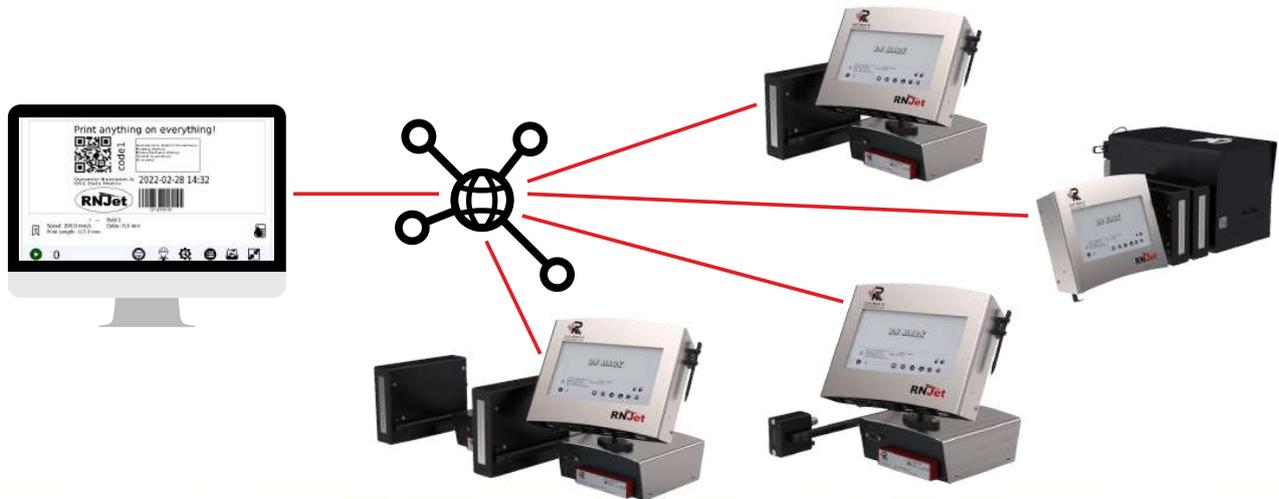

SOFTWARE & NETWORK	
Internal Message Library	More than 1000 messages
Interface & Keyboard Languages	English, French, Spanish, Italian, Portuguese, Polish, German, Czech, Arabic, Farsi, Russian, and many more
Supported Database Format	CSV, TXT
Print Modes	Single & Continuous
Fonts	Ability to add any True Type font
Software	RN Software & free Windows-based RN Soft
Network	Ability to add up to 100 printers on 1 PC

DATA INPUT & EXTERNAL POWER SPECIFICATION	
I/O Ports	Photocell, Shaft Encoder, Ethernet, RS-232, USB, RS 485, Beacon alarm
External Power	Input: 100-240V 50/60 Hz Output: 12v-5.0A, 60W Max

PRINTABLE SAMPLES

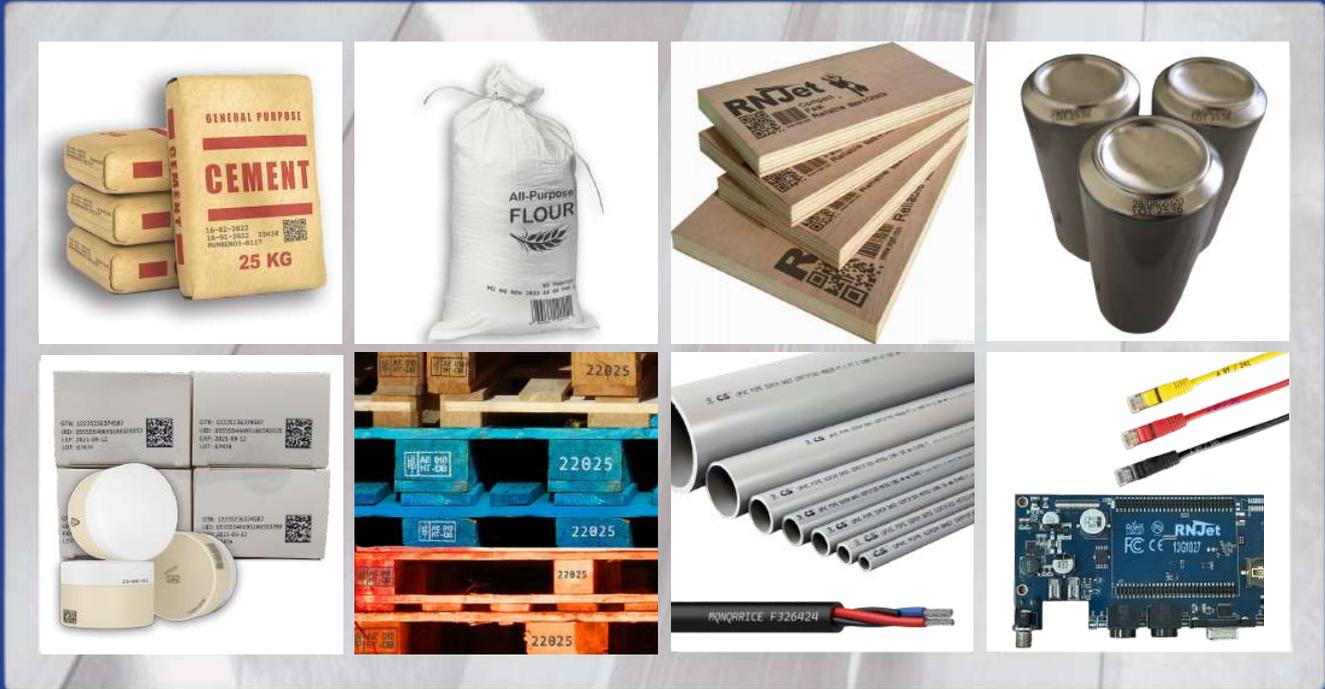

With RN Mark's inline solutions, it's easy and cost-effective to mark your product, whether it's metal or fiberglass material, plastic or cloth pleated paper or PET recyclable plastic! Consult with our specialist to get the right solution for your production line.

NEW ZEALAND BRANCH
PO Box 51793, Auckland 2140
3A Joval Ave, Wiri Auckland 2013, New Zealand

Phone: +64 9 262 0995
Email: support@galas.co.nz

www.galas.co.nz

AUSTRALIAN BRANCH
PO Box 213, Oxenford, QLD
Shop 20 / 100-106 Old Pacific Highway, Oxenford 4210,
Queensland, Australia
Offices in VIC/NSW/WA/SA
Phone: +61 7 5665 8284 **Email:** support@galasolutions.com.au
www.galasolutions.com.au